Life is not a straight line®

120,4070

BOLEFLOOR






Life is not a straight line

Bolefloor is the world's first industrial-scale manufactured hardwood flooring with naturally curved lengths that follow a tree's natural growth. Bolefloor takes its name from *bole*, the trunk of a tree.

Bolefloor has created the category of curved-length flooring for the market at large. Until now, unique floors like these have been the product of a few dedicated craftsmen. With Bolefloors, all that is changed.

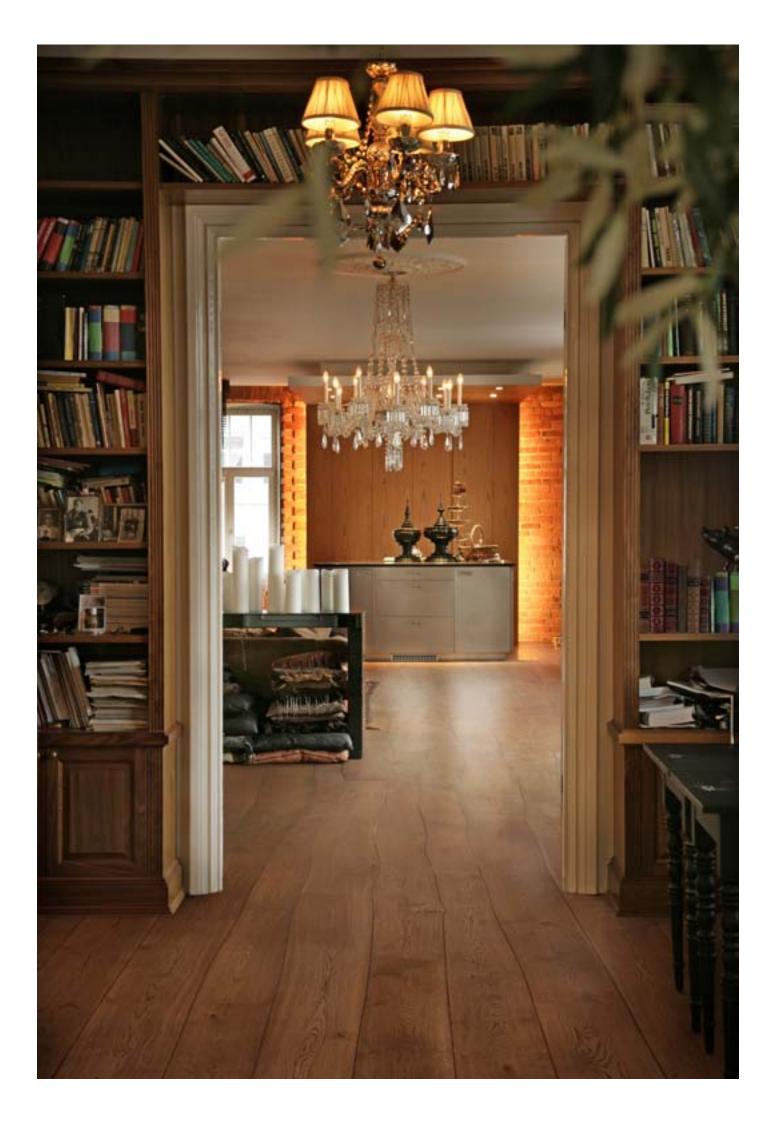





Return to a natural state

It wasn't nature that created straight floorboards: it was the limitations of technology. Bolefloor allows a return to a natural state — floors as nature intended.

A bolefloor for every situation

Solid flooring is the soul of Bolefloor, but some conditions still require a multilayer solution. Bolefloor's engineered product is ideal for conditions such as environments with inconsistent temperatures, powerful floor heating, or other "extreme" situations.



Ordinary tongue and groove product

Multilayer product. 5.7 mm top layer on 12 mm (Or 9 mm) plywood core

The grooviest grooves in the business

Bolefloors are available beveled and unbeveled or in a combination of both, including grooved- and ungrooved endjoints.

Our floorboards run to 3,000 mm in length with widths of 150-300 mm (there are slight, natural variations in places). Thicknesses available in solid wood are 20 mm and 13 mm, with multilayer available in 18 mm and 15 mm. For specially-engineered orders, production can accommodate up to 6,000 mm lengths and up to 450 mm in width.






More floors per forest

Bolefloor's optimization technology means savings in the name of nature. Not only does the surface please the eye, but Bolefloor innovations allow more floors per forest — we use up to 20% more of every sawn plank.

Bolefloor technology combines wood scanning systems, tailor-made CAD/CAM developments, and innovative optimization algorithms.

Just as Gutenberg's invention literally freed the book from monastic confines, Bolefloor technology makes natural curved-length flooring available to all those who value nature, as well as design.

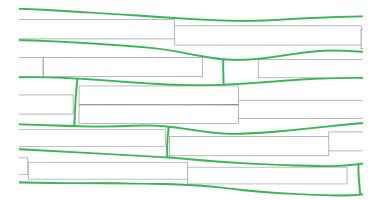


Bolefloor

Ordinary straight boards







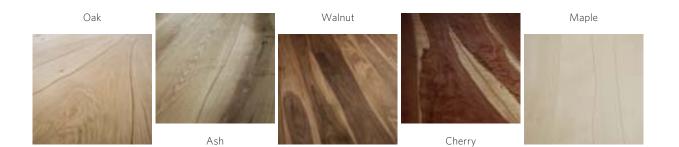



Five different species

Bolefloors are available in oak, ash, maple, cherry and walnut.

Our choice of species and grades is wide enough to meet a variety of tastes and fit the character of any interior.

Other species (tropical woods, for example) are available on a special order basis.

Available in select, natural and rustic


All Bolefloor species are available in Natural grade, with oak also available in Select and Rustic.

Bolefloor oak quality grades:

Select:	Our finest grade. No sapwood or dark knots on
	the face plane; healthy knots and "cat paw"
	present.
Natural:	Sapwood and small dark knots present,
	as well as healthy knots and "cat paw."

Rustic: Sapwood, dark knots and cracks up to 2 mm may be present.

For light-colored floors sapwood stripes are recommended when vitality is desired in the surface.

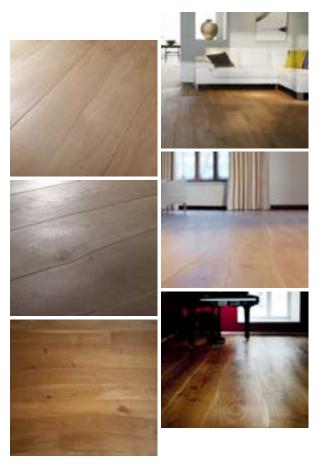

Measuring and installation

Installing a Bolefloor is as easy as installing a traditional floor. Each floor is made to measure and arrives in the exact size.

All Bolefloor products are ordinary tongue and groove (unless ordered otherwise), ready to install preferably by gluing down.

Trained installation and finishing teams work with professional flooring stores which offer our products. For large-scale projects, a Bolefloor representative will take measurements.

Exact specifications are important when ordering - architect CAD files are ideal but please exercise caution: files do not always correspond exactly to actual room dimensions. Consult or use your Bolefloor dealer's installation team to ensure proper sizing.



Ordinary tongue and groove





Groove

without inlay

terrace

Straight edge/ rounded bevel terrace



Colors and care


Bolefloors are available unfinished or oiled, and also brushed for those seeking an aged or distressed look.

Our preference is to ship unfinished floors, since local dealers offer the widest selection of finishes suitable for your part of the world.

Unfinished parquet should be lightly sanded (180 grit or to treatment supplier's specifications) after installation for better oil or lacquer performance.

Prefinished Bolefloors are available in WOCA Denmark oils and Osmo Hardwax finishing.



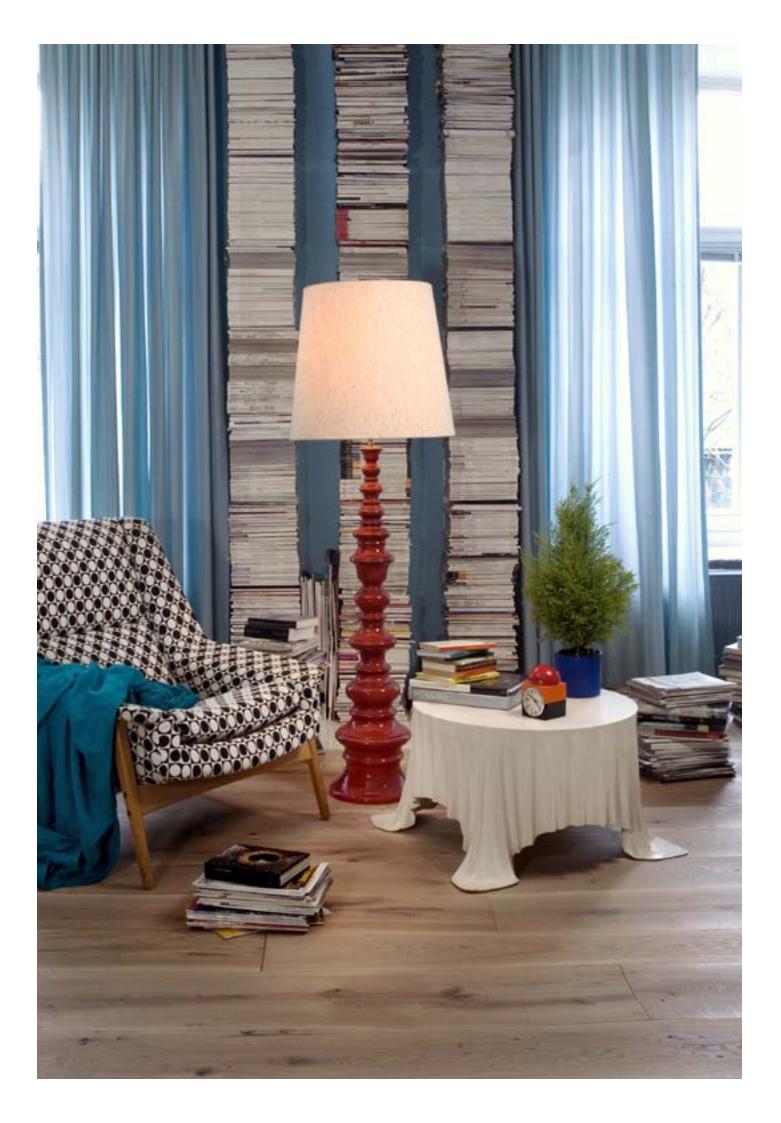

European Union Regional Development Fund Investing in your future

Prinsengracht 13 Amsterdam 1015 DK The Netherlands

Phone E-mail

BOLEFLOOR

C

BOLEFLOOR

+31 6 2055 4575 info@bolefloor.com www.bolefloor.com